

# TP Model



## Thin Panel LED Fixture 2x4 (Dimmable)

Aesthetics and high performance uniform light across the entire luminaire provides visual comfort.

### Product Specifications

#### FEATURES & BENEFITS:

- Modern and clean style, no exposed fasteners.
- Uniform light output and wide beam angle, bright and comfortable, to alleviate eye fatigue.
- Excellent luminaire efficacy provides significant energy saving.
- Dimmable via 0-10VDC standard
- Available in 3000K, 4000K, or 5000K color temperature.
- Rated Life : 50,000 hours

#### Applications :

- Shop lighting
- Commercial lighting
- Boutique lighting
- Illumination lighting
- Architectural lighting

**Lumen Output :** 40W -5000+/- 5% lumen  
60W -7500+/- 5% lumen

**Lumen Efficacy :** 125lm/Watt

**Operating Temperature:** -4 F to 113F (-20 to 45 C)

**Color Temperature (TYP):** 3000K, 4000K, or 5000K

**Color Rendering Index (CRI):** >80

#### Ordering Information

Example: **TP244040SM**

Model Number	Luminaire Type	Color Temperature	Output Wattage	Accessory
<b>TP</b>	<b>24</b>	<b>40</b>	<b>40</b>	<b>SM</b>
	<b>24- 2'x4'</b>	<b>30- 3000K 40- 4000K 50- 5000K</b>	<b>40- 40W 60- 60W</b>	<b>SM- Surface mount CB- Suspend Cable mount RE- Recess mount (Blank)- Lay-in</b>

#### Electrical System:

All electrical components are UL certified.

**Input Voltage:** 100~277VAC

**Power Consumption:** 40W, 60W

**Power factor:** >=0.95, THD <15%

#### Construction /Finish

- Aluminum +PMMA + PC Diffuser

#### Warranty

Five-year limited warranty.


#### Searchable DLC Product ID

DLC Model # BDPE24DUA-40WB-SKXXX  
BONLD




**Note:** Specifications subject to change without notice. Actual performance may differ as a result of end user environment and application.

**Dimensions:**

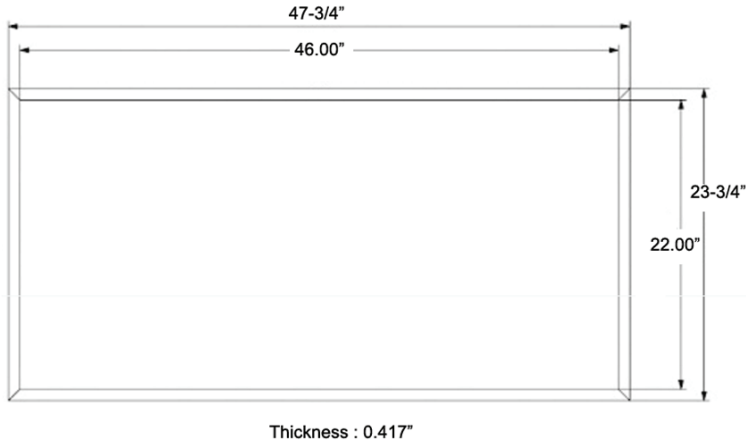

**Light Distribution:**

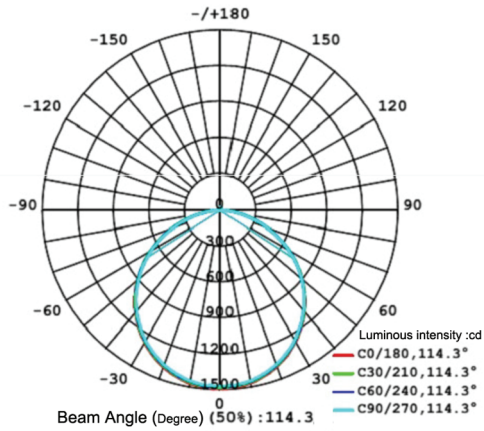

**Mounting Accessory:**

Surface mount



Suspend Cable mount

