

TR Model

DID Series



Dual Basket Recessed Troffer LED 2x2 (Dimmable)

Aesthetics and high performance uniform light across the entire luminaire provides visual comfort.

Product Specifications

FEATURES & BENEFITS:

- Modern and clean style, no exposed fasteners.
- Direct replacement of 2'x2' fluorescent troffer luminaire.
- Excellent luminaire efficacy provides significant energy saving.
- Swing down diffuser lens for easy maintenance
- Dimmable via 0-10VDC standard
- Available in 3000K, 3500K, 4000K, 5000K color temperature.
- Rated Life : 50,000 hours
- Assembled in USA with domestic and imported components
- RoHS Compliant - Mercury free and Lead free

Applications :

- Shop lighting
- Commercial lighting
- Boutique lighting
- Illumination lighting
- Architectural lighting

Lumen Output :
 24W -3000K : 2038 lumen
 24W -5000K : 2400 lumen
 36W -3000K : 3378 lumen
 36W -5000K : 3638 lumen

Operating Temperature: -4 F to 104 F (-20 to 40 C)

Color Temperature (TYP): 3000K, 3500K, 4000K & 5000K

Color Rendering Index (CRI): 80

Ordering Information

Example: **TR224036DIDG**

Electrical System:

All electrical components are UL certified.

Input Voltage: 120/277VAC

Power Consumption: 24W and 36W

Construction /Finish

- 24 guage die formed cold-rolled steel bod
- All steel surfaces are powder coated.
- Smooth edge for easy handling.
- Swing down diffuser lens for easy maintenance.

Warranty


Five-year limited warranty.



Model Number	Luminaire Type	Color Temperature	Output Wattage	Luminaire Series	Installation
TR	22	40	36	DID	G (Optional)
	22- 2'x2'	30- 3000K 35- 3500K 40- 4000K 50- 5000K	24- 24W 36- 36W	DID- dual basket recessed troffer	G- Standard Lay-in Grid T- Concealed T S- Slot Grid F- Flange Trim with supporting swing Gates

Note: Specifications subject to change without notice. Actual performance may differ as a result of end user environment and application.


Dimensions:

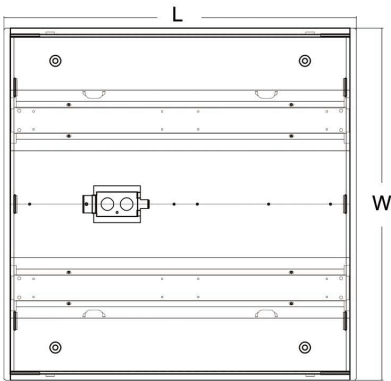


Length - 23-3/4"
Width - 23-3/4"
Depth - 4"

Installation Method


G
 Grid/Lay-in
 Standard




G
 Concealed T



G
 Slot Grid



F
 Flange Trim
 With Supporting
 Swing Gates



**Ceiling
 Type**

Exposed Grid
 Concealed T
 Slot Grid
 Flange

**Trim
 Type**

G
 G
 G
 G***

When order Flange Kit for installation in drywall ceiling, please consult us for compatibility.