



## **FEATURES & BENEFITS:**

- Modern and clean style, no exposed fasteners.
- Excellent luminaire efficacy provides significant energy saving.
- Can be suspended mount from the ceiling by AYC or EYE chain or direct mount on the ceiling.
- Dimmable via 0-10VDC standard
- Available in 4000K, 5000K & 5700K color temperature.
- Rated Life : 50,000 hours
- Assembled in USA with domestic and imported components
- RoHS Compliant Mercury free and Lead free

## **Applications :**

- Warehouse
- Commercial lighting
- Retail lighting
- Industrial lighting
- Factory lighting

lumen Output: 140W -14000 llumen

# Operating Temperature: -4 F to 104 F (-20 to 40 C) Golor Temperature (TYP): 4000K , 5000K & 5700K

#### Color Rendering Index (CRI): 80

#### Ordering Information Example: TR4450140HIBA

Model Number Luminaire Type

Color Temperature Output Wattage

Luminaire Series

Installation

TR	44	50	140	HIB	A (Lens)
	<b>44</b> - 4Lx4'	<b>40-</b> 4000K <b>50-</b> 5000K <b>57-</b> 5700K	<b>140- 1</b> 40W	HIB- High Bay	<ul> <li>A- Frosted and Flat</li> <li>B- Frosted and Prismatic</li> <li>C- Clear and Flat</li> <li>D- Clear and Prismatic</li> </ul>

**Note:** Specifications subject to change without notice. Actual performance may differ as a result of end user environment and application.

Rev 1 - 03/02/15



Page 1 of 2

## TR Model HIB Series

## High Bay Troffer LED 4Lx4' (Dimmable)

This high performance and energy efficient High Bay LED troffer is ideal for retail, warehouse, industrial, commercial and manufacturing large area lighting applications.

## **Product Specifications**

#### **Electrical System:**

All electrical components are UL certified.

Input Voltage: 120-277VAC

Power Consumption: 140W

#### **Construction / Finish**


- 22 guage die formed cold-rolled steel body
- All steel surfaces are powder coated.
- Can be suspended mount from the ceiling by AYC or EYE chain or direct mount on the ceiling.

#### Warranty


Five-year limited warranty.



### **Dimensions:**

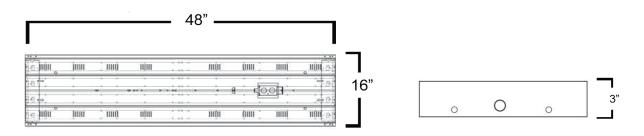

### **Photometrics:**

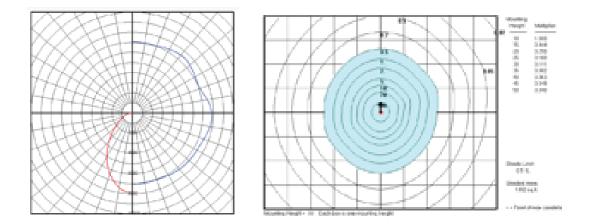

Rev 1 - 03/02/15

Page 2 of 2

