



TR Model

HIB3 Series

High Bay Troffer LED 4'x4L (Dimmable)

This high performance and energy efficient High Bay LED troffer is ideal for retail, warehouse, industrial, commercial and manufacturing large area lighting applications.

Product Specifications

FEATURES & BENEFITS:

- Modern and clean style, no exposed fasteners.
- Excellent luminaire efficacy provides significant energy saving
- Can be suspended mount by V-clips for chain or cable or direct mount on the ceiling.
- Dimmable via 0-10VDC standard
- Available in 4000K & 5000K color temperature.
- Rated Life : 50,000 hours
- Assembled in USA with domestic and imported components
- RoHS Compliant - Mercury free and Lead free

Applications :

- Warehouse
- Commercial lighting
- Retail lighting
- Industrial lighting
- Factory lighting

Lumen Output : 178W -24,030 lumen, 135lumen/watt

Operating Temperature: -4 F to 104 F (-20 to 40 C)

Color Temperature (TYP): 4000K & 5000K

Color Rendering Index (CRI): >80

Ordering Information

Example: **TR4450178HIB3P**

Model Number	Luminaire Type	Color Temperature	Output Wattage	Luminaire Series	Mounting Method
TR	44	50	178	HIB3	P
	44- 4'x4L	40- 4000K 50- 5000K	178- 178W	HIB3- High Bay v3	V- V Hook & Chain P- Pendant C1 - Cable (aircraft) - Hook C2 - Cable (aircraft) - Toggle

Electrical System:

All electrical components are UL certified.

Input Voltage: 120-277VAC

Power Consumption: 178W

Construction /Finish

- 22 guage die formed cold-rolled steel body
- All steel surfaces are powder coated.
- Can be suspended mount by V-clips for chain or cable or direct mount on the ceiling.


Warranty

Five-year limited warranty.




Note: Specifications subject to change without notice. Actual performance may differ as a result of end user environment and application.

Dimensions:

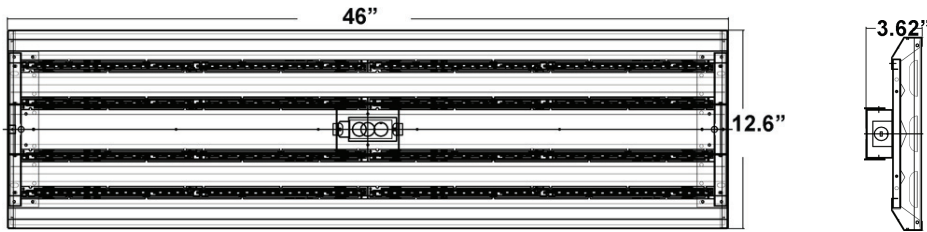


Mounting Options:

V-clips for dual point chain or cable (Standard)



Pendant mount

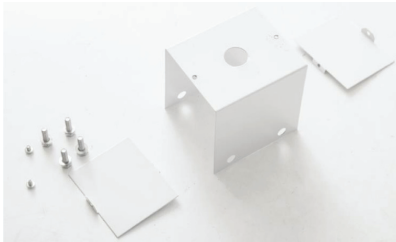

Cable mount (Hook or Toggle ends)



Wiring Diagram:

