



FEATURES & BENEFITS:

- Modern and clean style, no exposed fasteners.
- $\hbox{-} \ {\sf Excellent\ luminaire\ efficacy\ provides\ significant\ energy\ saving.}$
- Can be suspended mount from the ceiling by AYC or EYE chain or direct mount on the ceiling.
- Dimmable via 0-10VDC standard
- Available in 4000K, 5000K &5700K color temperature.
- Rated Life: 50,000 hours
- Assembled in USA with domestic and imported components
- RoHS Compliant Mercury free and Lead free

Applications:

- Warehouse
- Commercial lighting
- Retail lighting
- Industrial lighting
- Factory lighting

Lumen Output: 210W -21000 llumen

Operating Temperature: -4 F to 104 F (-20 to 40 C) **Color Temperature (TYP):** 4000K, 5000K & 5700K

Color Rendering Index (CRI): 80

Ordering Information Example: TR6450210HIBA

TR Model

HIB Series

High Bay Troffer LED 6Lx4' (Dimmable)

This high performance and energy efficient High Bay LED troffer is ideal for retail, warehouse, industrial, commercial and manufacturing large area lighting applications.

Product Specifications

Electrical System:

All electrical components are UL certified.

Input Voltage: 120-277VAC **Power Consumption:** 210W

Construction / Finish

- 22 guage die formed cold-rolled steel body
- All steel surfaces are powder coated.
- Can be suspended mount from the ceiling by AYC or EYE chain or direct mount on the ceiling.

Warranty

Five-year limited warranty.





Model Number	Luminaire Type	Color Temperature	Output Wattage	Luminaire Series	Installation	
TR	64	50	210	HIB	A (Lens)	
	64- 6Lx4'	40- 4000K 50- 5000K 57- 5700K	210- 21 0W	HIB- High Bay	A- Frosted and Flat B- Frosted and Prismatic C- Clear and Flat D- Clear and Prismatic	


Note: Specifications subject to change without notice. Actual performance may differ as a result of end user environment and application.

Rev 1 - 03/02/15 Page 1 of 2







Dimensions:

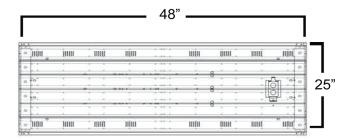



Photometrics:





Rev 1 - 03/02/15 Page 2 of 2

