





#### **FEATURES & BENEFITS:**

- Modern and clean style, no exposed fasteners.
- Excellent luminaire efficacy provides significant energy saving.
- Can be suspended mount from the ceiling by AYC or EYE chain or direct mount on the ceiling.
- Dimmable via 0-10VDC standard
- Available in 4000K, 5000K &5700K color temperature.
- Rated Life: 50,000 hours
- Assembled in USA with domestic and imported components
- RoHS Compliant Mercury free and Lead free

# **Applications:**

- Warehouse
- Commercial lighting
- Retail lighting
- Industrial lighting
- Factory lighting

Lumen Output: 280W -28000 llumen

**Operating Temperature:** -4 F to 104 F (-20 to 40 C) **Color Temperature (TYP):** 4000K, 5000K & 5700K

**Color Rendering Index (CRI):** 80

Ordering Information Example: TR8450280HIBA

# TR Model

# **HIB Series**

# High Bay Troffer LED 8Lx4' (Dimmable)

This high performance and energy efficient High Bay LED troffer is ideal for retail, warehouse, industrial, commercial and manufacturing large area lighting applications.

# **Product Specifications**

#### **Electrical System:**

All electrical components are UL certified.

**Input Voltage:** 120-277VAC **Power Consumption:** 280W

#### **Construction/Finish**

- 22 guage die formed cold-rolled steel body
- All steel surfaces are powder coated.
- Can be suspended mount from the ceiling by AYC or EYE chain or direct mount on the ceiling.

#### Warranty

Five-year limited warranty.





Model Number	Luminaire Type	Color Temperature	Output Wattage	Luminaire Series	Installation	
TR	84	50	280	HIB	A (Lens)	
	<b>84-</b> 8Lx4′	<b>40-</b> 4000K <b>50-</b> 5000K <b>57-</b> 5700K	<b>280- 28</b> 0W	HIB- High Bay	A- Frosted and Flat B- Frosted and Prismatic C- Clear and Flat D- Clear and Prismatic	


**Note:** Specifications subject to change without notice. Actual performance may differ as a result of end user environment and application.

Rev 1 - 03/02/15 Page 1 of 2






### **Dimensions:**

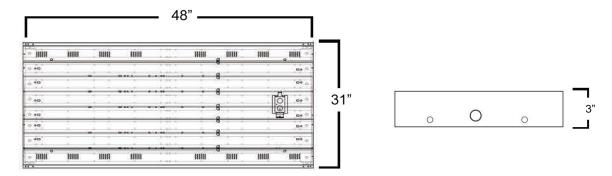

## **Photometrics:**

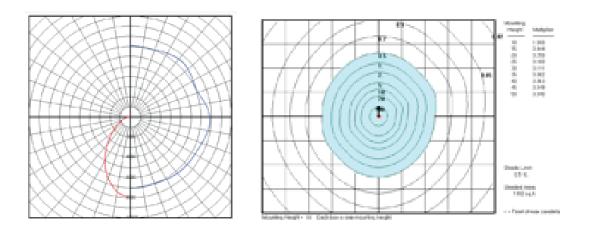

Rev 1 - 03/02/15 Page 2 of 2

