




LED RITE

Manufacturer for LED Luminaires

Parking and Area Light

LT Model - Designed for Minimum
Labor Installation

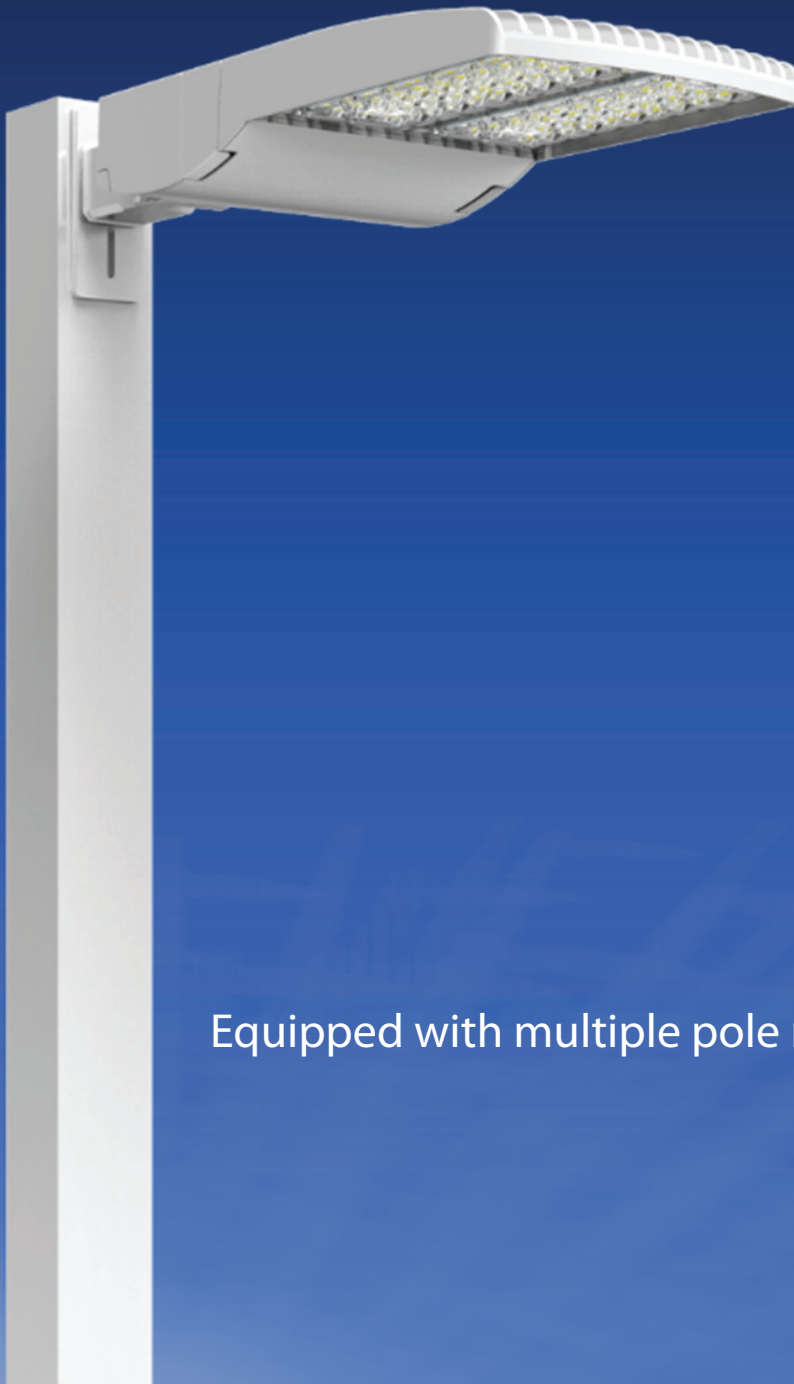

Equipped with multiple pole mounting solutions



LED Area Light

Housing

- Die cast aluminum housing
- Modular design, easy for installation, replacement and maintenance
- Slim appearance, low wind resistance
- Tool free , one person installation


Finish

- Corrosion resistant polyester
- Standards colors: Dark Bronze
- Customized colors are available.



LED Optics

- IP67 LED Module
- Type 3, Type 4, Type 5 optional

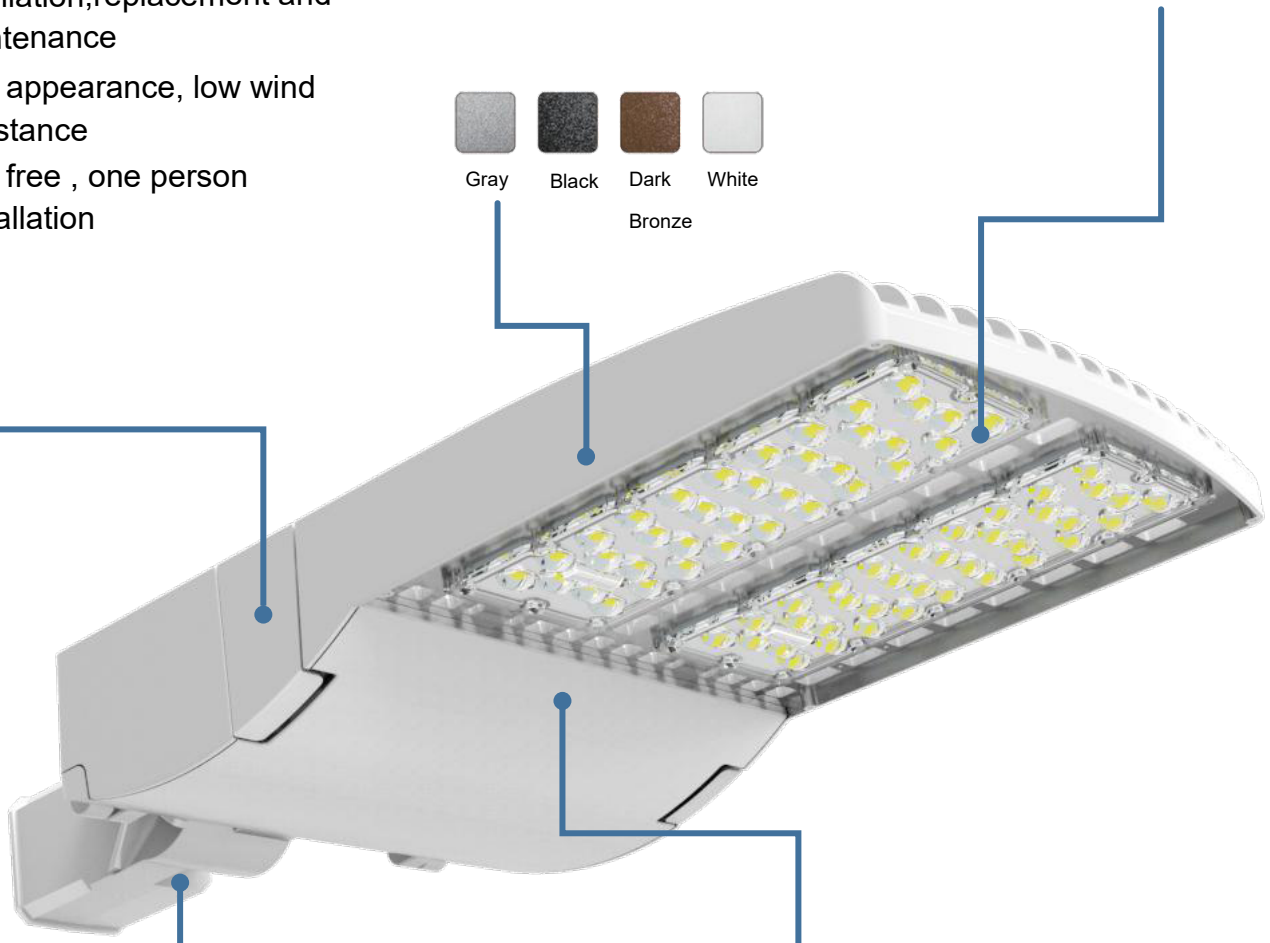

Mounting

- Standard mounting diameter is 2 3/8" (60mm)
- 9 installation brackets for option

Electrical/Control

- 120-277VAC and 277-480VAC available.
- Surge protection to 20KV
- High quality LED and driver
- Photocell and motion sensor optional

TECHNICAL PARAMETERS

Wattage	60-320W	IP	IP65
Power	120-277VAC/277-480VAC	LED	Lumileds
PF	0.9	Certifications	ETL/DLC
Life Span	50,000hrs	Photocell	Optional
Efficacy	130-140lm/W	Motion Sensor	Optional
CCT	3000-5700K	0-10V	Standard
CRI	75	Optics	Type3/Type4/Type5
Operating Temperature	-40-50℃	Finish	Dark Bronze



ORDERING INFORMATION

Product Series	Wattage	Power	CCT	Optics	Finish	Installation	Control
LT	60/80/100/120/150/200/240/320	A/B	XK	N	U	Z	D
LT	60	A 120-277V	3K	3	D Dark	ARM Arm-Round-Medium	D0 Without control sensor
	60W		3000K	Type3	Bronze	ARL Arm-Round-Large	D1 Photocell
	80	B 277-480V	4K	4	W White	ASL Arm-Square-Large	D2 Motion Sensor
	80W		4000K	Type4		ASM Arm-Square-Medium	D3 Both
	100		5K	5	G Gray	AOK Arm one-key operation	
	100W		5000K	Type5		AON Arm one-key not operation	
	120					SLI Slip Fitter	
	120W					TRU Trunnion	
	150					SLO Slip fitter for one	
	150W						
	200						
	200W						
	240						
	240W						
	320						
	320W						

Example: LT150A5K3DSLID0


LT Model, 150W, 120-277V, 5000K, Type3 distribution, Dark Bronze, Slip Fitter mount, No Control sensor

Products

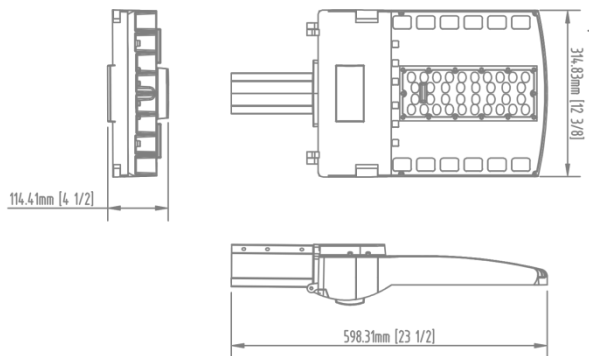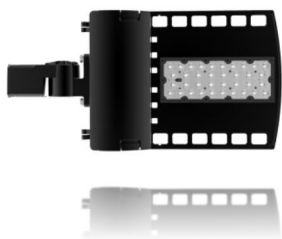


Net Weight	14.08 lb
Gross Weight(kg)	17.38 lb
Product Dimension	23-1/2*12-3/8*4-1/2 in
Carton Dimension	27-1/4*14-1/2*8-1/4 in

Wattage	Voltage	Efficacy	
		3000K	4000K/5000K
60W	120-277V/277-480V	135lm/W	140lm/W
80W	120-277V/277-480V	135lm/W	140lm/W
100W	120-277V/277-480V	130lm/W	135lm/W
120W	120-277V/277-480V	130lm/W	135lm/W

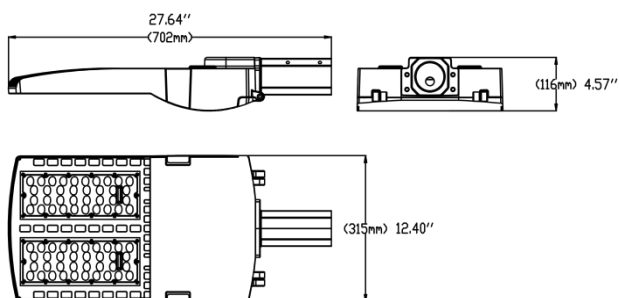

Net Weight	19.58 lb
Gross Weight(kg)	22.88 lb
Product Dimension	27-5/8*12-3/8*4-1/2 in
Carton Dimension	31-5/8*14-1/2*9-3/8 in


Wattage	Voltage	Efficacy	
		3000K	4000K/5000K
150W	120-277V/277-480V	135lm/W	140lm/W
200W	120-277V/277-480V	135lm/W	140lm/W

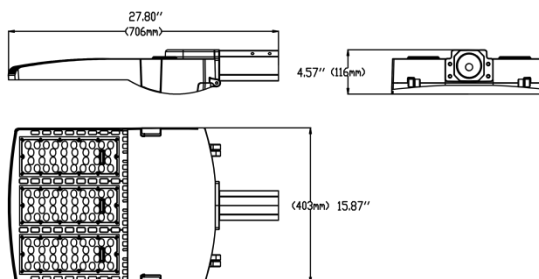


Net Weight	24.64 lb
Gross Weight(kg)	28.60 lb
Product Dimension	27-3/4*15-7/8*4-1/2 in
Carton Dimension	31-5/8*18-1/8*9-1/2 in

Wattage	Voltage	Efficacy	
		3000K	4000K/5000K
240W	120-277V/277-480V	130lm/W	135lm/W
320W	120-277V/277-480V	130lm/W	135lm/W


INSTALLATION BRACKETS




AOK




AON




ARL




ASL




TRU





ARM



ASM




SLI




SLO


ONE PERSON INSTALLATION

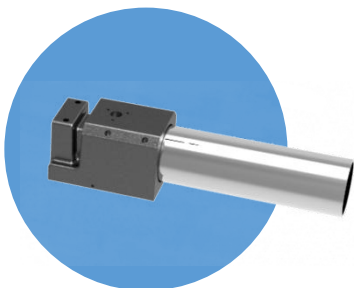

Step1: Installation the bracket to the pole

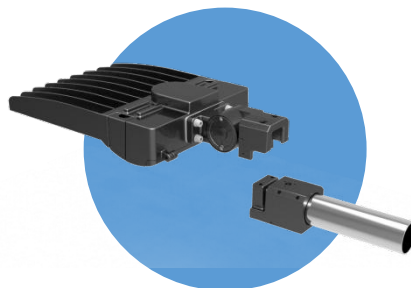



Step2: Aiming the fixture to bracket

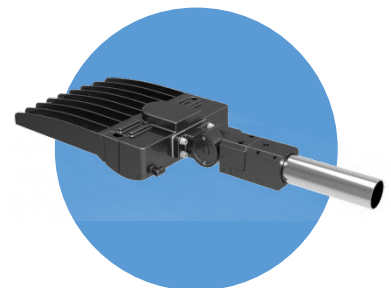


Step3: Tighten the screws. Then finish

ACCESSORIES



Square Pole Adaptor

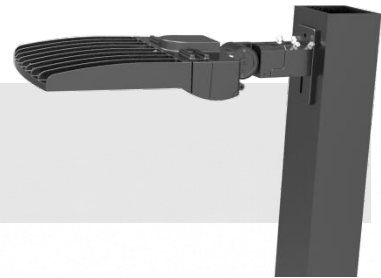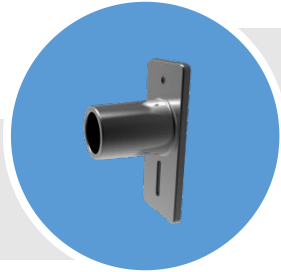


Wall Mount Adaptor




Round Pole Adaptor

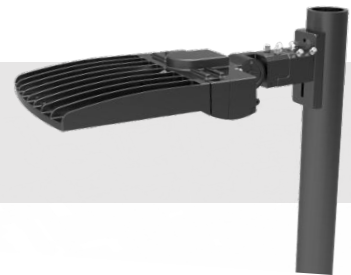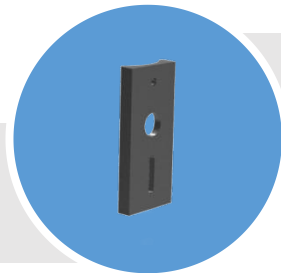


Photocell optional




Motion Sensor Optional




PHOTOMETRIC

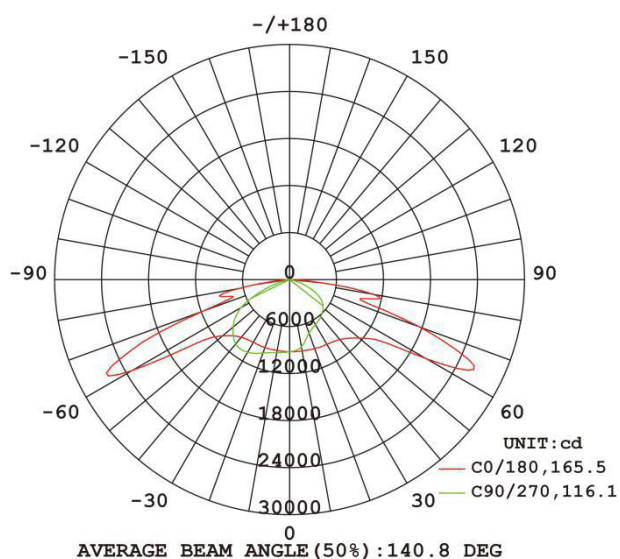

Type3

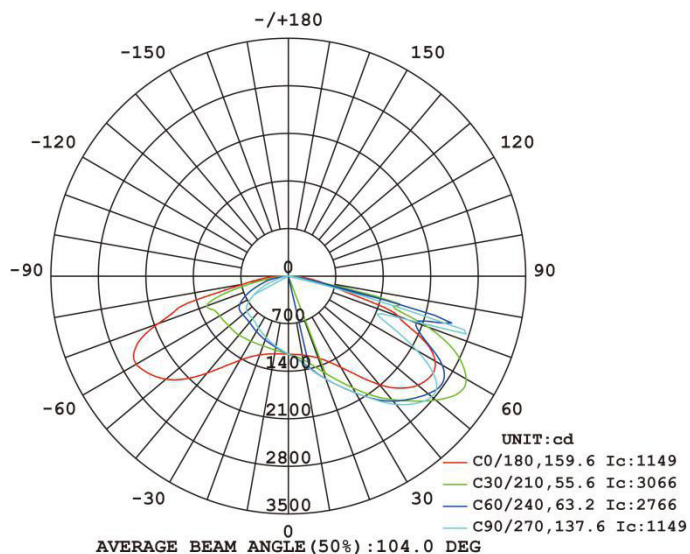

Type4

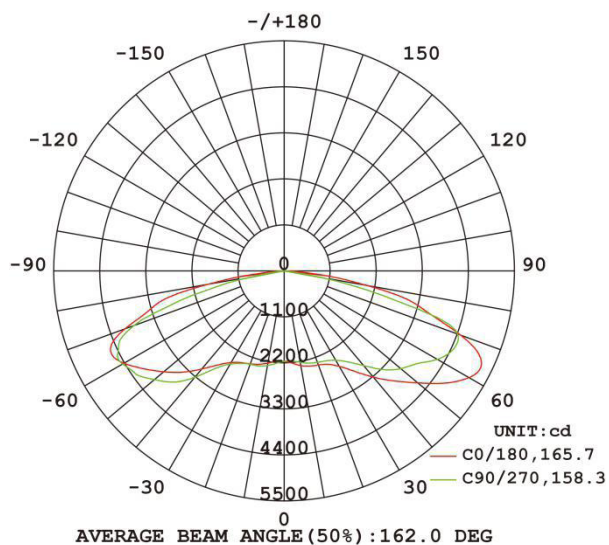

Type5

Searchable DLC Model

60W: JNT03-ALC60- 30k(40k, 50k)-3-U-Z-D
80W: JNT03-ALC80- 30k(40k, 50k)-3-U-Z-D
100W: JNT03-ALC100- 30k(40k, 50k)-3-U-Z-D
120W: JNT03-ALC120- 30k(40k, 50k)-3-U-Z-D
150W: JNT03-ALC150- 30k(40k, 50k)-3-U-Z-D

200W: JNT03-ALC200- 30k(40k, 50k)-3-U-Z-D
240W: JNT03-ALC240- 30k(40k, 50k)-3-U-Z-D
320W: JNT03-ALC320- 30k(40k, 50k)-3-U-Z-D